



YURATEK

YRT-1000

A professional Approach to Refraction Units

www.yuratek.com

YRT-1000

Refraction Units

TECHNICAL SPECIFICATIONS UNIT AND CHAIR

Unit	YRT-1000
Power	110 or 240 VAc 50-60 Hz
Electrical Classification	Class I, Type B
Table Top Electrical Output	110 or 220 VAc & 0-6/12(SL)
Head Lamp Dimmable	Led Lamp
Maximum Load of Table	20 kg + 20 kg
Chair Carring Capacity	150 kg
Chair Stroke	180 mm

STANDARD FEATURES

Sliding Table for 2 Instruments
Dimmable Head Lamp
Chart Projector Plate
Safety Knee Switch
Manuel Phoropter Arm
Motorized Chair with Fixed Backrest

CONTROL PANEL


Power On/Off Control
Chair Up/Down Elevation Control
Aux On/Off Control
Head Lamp Dimmable Control
Slit Lamp Illumination Light Control

OPTIONAL ACCESSORIES

Autobalance Phoropter Arm
Sliding Manuel Phoropter Arm
Foldable Chair Arm Rest
Foldable Chair Foot Rest
Reading Lamp (Near Vision)
Monitor Support Arm
Triple Trail Lens Drawer (Mobile)
Inclinable Chair Backrest 45°
Inclinable Chair Backrest 180°
Chair Rotation
Manual Horizontal Chair Movement
Chair Stroke 200/300/400 mm

Please contact us for customised options, accessories and detailed information.

STANDARD TYPE TECHNICAL DRAWING

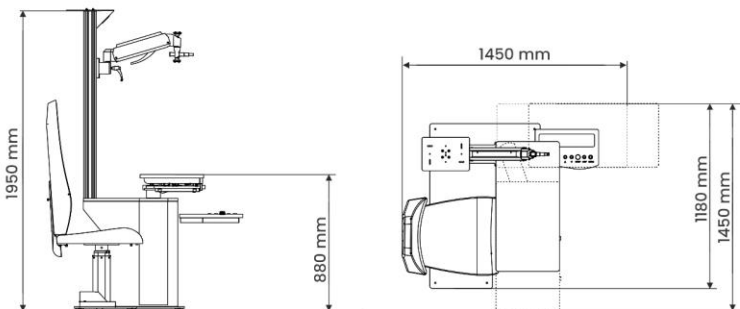

Optional Drawer Type



If limitations in space for a refraction unit make the use of a small refraction unit essential YRT-1000 will be applied.



Please note that left-handed unit is manufactured only in the factory by order.



TDÜ.720/12.08.2020/REV.T.18.03.2022/01